

Technical data sheet

Round conductor, galvanised steel

Item no. 5021103



- Can be used as a conductor and earthing conductor according to DIN EN 62561-2 (VDE 0185-561-2)
- Corresponds to the requirements of VDE 0185-305 (IEC 62305)
- RD 10 can also be used in the earth
- Zinc coating: $\geq 350 \text{ g/m}^2$ (approx. $50 \text{ }\mu\text{m}$ in mean value)




St	Steel
FT	Hot-dip galvanised

Master data

Item no.	5021103
Type	RD 10
Description 1	Round conductors
Description 2	80 m ring
Dimension	10mm
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	80,00 m
Weight	63,00 kg/100 m

Technical data

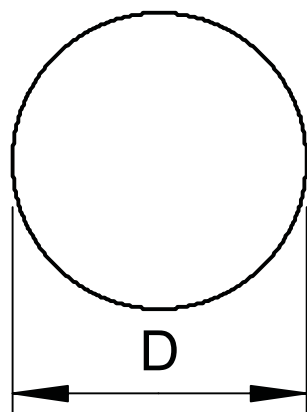

Dimension D	10,00 mm
Number of individual wires	1,00
Diameter	10,00 mm
High voltage-resistant, insulated version	☐
Normal ring	80 ca. m
Normal ring	50,00 ca. kg
Nominal size Ø	10 mm
Cross-section	78,00 mm ²
Material property	Other
Material jacket	Without