

# Technical data sheet

## Wall and support bracket AWG 15

Item no. 6420628



Light-duty wall and support bracket with welded head plate for screwless mesh cable tray fastening.




**A2** Stainless steel, rustproof 1.4301  
**2B** Bright, reworked

Additional product text, instruction | Fastening of the bracket to the U support of width 400 mm or greater using a hexagonal bolt through both sides of the support. Please insert suitable spacers.

### Master data

Item no.	6420628
Type	AWG 15 21 A2
Description 1	Wall and support bracket
Description 2	for mesh cable tray
Dimension	B210mm
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	1,00 Piece
Weight	25,00 kg/100 pc.

### Technical data

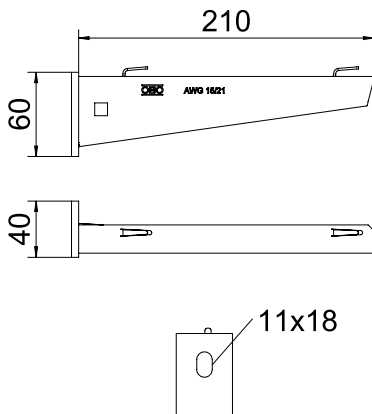

Width	210,00 mm
Side height	60,00 mm
Dimension A	40,00 mm
Dimension B	210,00 mm
Dimension H	60,00 mm
Dimension L	210,00 mm
Hole diameter	11,00 mm
Dimension value	210 x 60
Version	Wall and support brackets
Version	Wall and support bracket
F in kN	1,50 kN
for width	200,00 mm
Suitable for maintaining electrical function	<input type="checkbox"/>
Rustproof steel, pickled	<input checked="" type="checkbox"/>
Angle range	90,00 - 90,00 °


# Technical data sheet

## Wall and support bracket AWG 15

Item no. 6420628



### Load charts

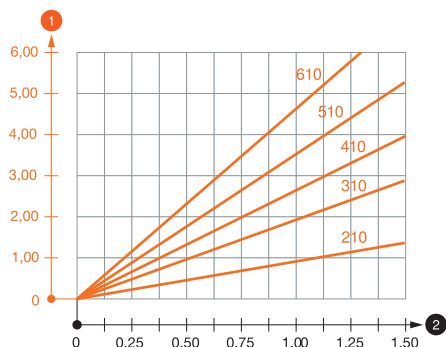

Load values heading\_Characteristic anchor values  
Heading, load table  
Footnote, load table

Characteristic anchor load values for wall and support bracket AW G 15

Wall bracket load

Max. total load  $F = \text{cable weight} + \text{cable tray} + \text{bracket}$ . The load capacity values increase considerably when used in uncracked concrete. The values given are based on concrete of strength class C20/25. Observe the installation conditions of the DIBt approval (anchors).

Load diagram, bracket type AW G 15

1 Bending of the bracket tip at permitted bracket load

2 Permitted bracket load in kN without man load

— Load curve with bracket lengths in mm

### Characteristic anchor load values for wall and support bracket AW G 15

Bracket load							
	Anchor	Max. total load $F$ in kN					
	Permitted	Bracket length in mm					
	$F$ kN	100	200	300	400	500	600
	3,57	1,09	0,90	0,73	0,65	0,61	0,55

Max. total load  $F = \text{cable weight} + \text{cable tray} + \text{bracket}$ . The load capacity values increase considerably when used in uncracked concrete. The values given are based on concrete of strength class C20/25. Observe the installation conditions of the DIBt approval (anchors).

### Characteristic anchor load values for wall and support bracket AW G 15

T1	Bracket load						
T2	Anchor	Max. total load $F$ in kN					
T3	Permitted	Bracket length in mm					
T4	$F$ kN	100	200	300	400	500	600
	3,57	1,09	0,90	0,73	0,65	0,61	0,55