

Technical data sheet

Device installation trunking Rapid 45-2, Type GA-53165

Item no. 6112603



Aluminium complete device installation trunking, consisting of a base and cover. The base has no floor perforation.



Alu	Aluminium
EL	Anodised

Additional product text 1

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by permitted scatter due to the material and process conditions cannot be avoided (according to DIN 17 611). 45 mm devices can be clicked in directly. When using PC/ABS hood fittings, there may be colour differences due to the different materials.

Master data

Item no.	6112603
Type	GA-53165EL
Description 1	Device installation trunking
Description 2	Rapid 45-2, 2-compartment,alum
Dimension	53x165x2000
Material	Aluminium
Material symbol	Alu
Surface	Anodised
Surface symbol	EL
Smallest sales unit (VG)	2,00 m
Weight	370,75 kg/100 m


Technical data sheet

Device installation trunking Rapid 45-2, Type GA-53165

Item no. 6112603



Technical data

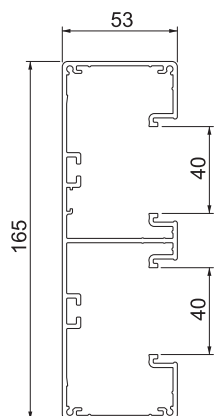

Length	2.000,00 mm
Width	165,00 mm
Height	53,00 mm
Number of covers	2,00
Number of insertable partitions	2,00
Rear panel version (inner side)	Continuous C profile
Rectangular shape	<input checked="" type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Cable retaining clip	<input type="checkbox"/>
Duct connector	<input type="checkbox"/>
Cover mounting type	Internal
Mounting perforation in base	<input type="checkbox"/>
Cover width	45 mm
Cover width 2	45,00 mm
Cover width 3	0,00 mm
Cover supplied	<input checked="" type="checkbox"/>
Protective film	<input checked="" type="checkbox"/>
Symmetrical	<input checked="" type="checkbox"/>