


Technical data sheet

Fire protection screw tie

Art.-Nr. 3498103

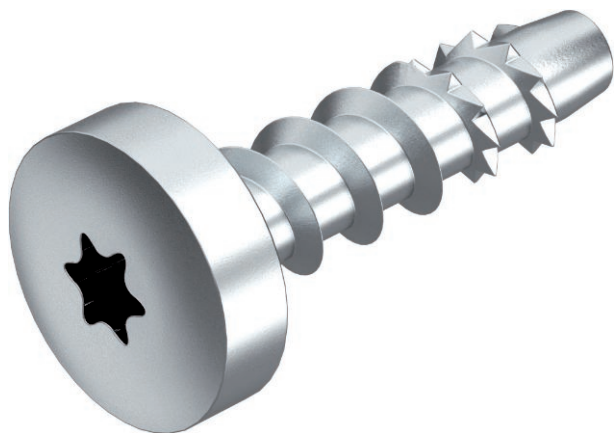

Fire protection screw tie with pan head for direct installation without anchors. Drive T30, drill hole 5 mm. Tested anchor according to ETAG 001 - Part 3. Fire resistance class to R120 for concrete and masonry.



St Steel

G Electrogalvanised

Additional product text, instruction

Substrate


The screw ties are suitable for screwing into the following types of masonry:

- Calcareous sandstone - Full brick (KSV)
- Calcareous sandstone - Hollow brick (KSL)
- Whole brick (Vz)

Master data

Item no.	3498103
Type	MMS-plus 6X35
Description 1	Fire protection screw tie
Description 2	panhead, T30 drive
Dimension	6x35mm
Material description	Steel
Material	Steel
Material symbol	St
Interface description	Electrogalvanised
Surface	Electrogalvanised
Surface to DIN	DIN EN 12329
Surface symbol	G
Smallest sales unit	100,00 Piece
Weight	0,90 kg/100 pc.

Technical data

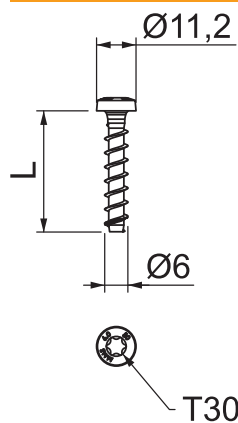

Length	35,00 mm
Dimension L	35,00 mm
Dimension	6 x 35 mm
Anchor/nail/bolt version	Spiral anchor
Drill hole diameter	5,00 mm
Anchor length	50,00 mm
Head diameter	11,20 mm
Head shape	Other
Head shape	Other
Thread	6
Screw system	Torx
Screw system	Torx