

Technical data sheet

Insulated air-termination rod

Item no. 5408947



- For isolated creation of air-termination systems
- Suitable for isFang air-termination rod stands, type isFang 3B-100/150
- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- For installation on the building structure with isFang support
- Fastening of the OBO isCon® conductor possible using accessories
- Suitable for externally routed isCon® conductors



GFK Fibre-glass-reinforced plastic

Master data

Item no.	5408947
Type	isFang 6000 AL
Description 1	Insulated interception rod
Dimension	6000mm
Colour	Light grey
Material	Fibreglass reinforced plastic
Material symbol	GFK
Smallest sales unit (VG)	1,00 Piece
Weight	600,00 kg/100 pc.


Technical data sheet

Insulated air-termination rod

Item no. 5408947



Technical data

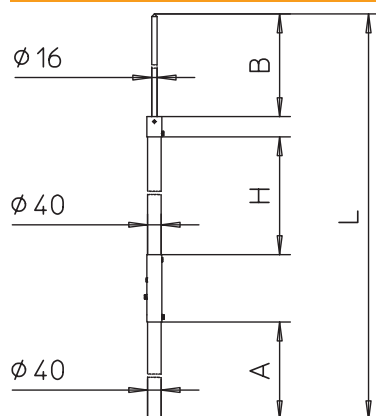

Length	6.000,00 mm
Dimension A	3.340,00 mm
Dimension B	1.000,00 mm
Dimension D	40,00 Ø mm
Dimension H	1.500,00 mm
Connection	Round conductor
Version	Air-termination rod
High voltage-resistant, insulated version	☒