


Technical data sheet

isFang, insulated air-termination rod for inner-routed
isCon conductor with side exit
Item no. 5408888



- For installation of the OBO isCon® Pro+ conductor in the pipe
- With side conductor outlet matching isFang air-termination rod stand with side outlet, type isFang 3B-A
- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- Inclusive connection element (type isCon IN connect)
- Inclusive potential connection (type isCon IN PAE)

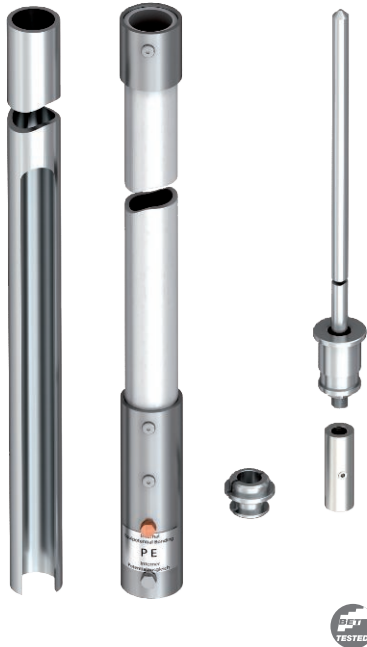

GFK Fibre-glass-reinforced plastic

Master data


Item no.	5408888
Type	isFang IN-A 8000
Description 1	Insul. interception rod+outlet
Description 2	for isCon conductor, internal
Dimension	8000mm
Material	Fibreglass reinforced plastic
Material symbol	GFK
Smallest sales unit (VG)	1,00 Piece
Weight	1.385,00 kg/100 pc.

Technical data sheet

isFang, insulated air-termination rod for inner-routed
isCon conductor with side exit
Item no. 5408888



Technical data

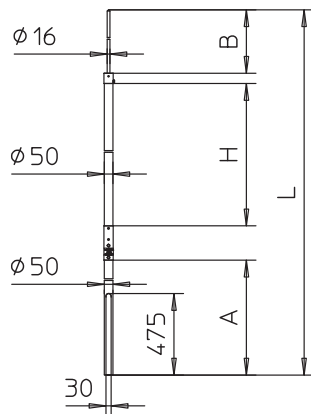

Length	8.000,00 mm
Dimension A	5.335,00 mm
Dimension B	1.000,00 mm
Dimension D	50,00 Ø mm
Dimension H	1.500,00 mm
Dimension L	8.000,00 mm
Connection	Round conductor
Version	Air-termination rod
High voltage-resistant, insulated version	☒