


Technical data sheet

Insulated air-termination rod for inner-routed isCon®
conductor with side exit
Item no. 5408878



- For routing OBO isCon® conductors in pipes
- For mounting on the building structure with isFang support
- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- Tested according to VDE V 0185-561-8 (IEC TS 62561-8)

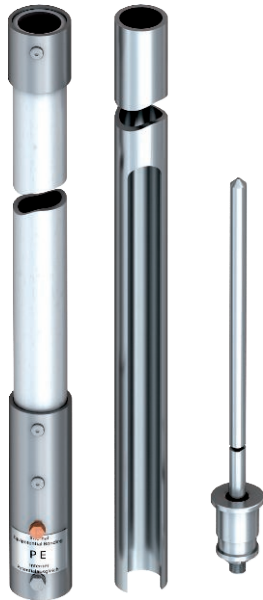

GFK Fibre-glass-reinforced plastic

Master data


Item no.	5408878
Type	isFang IN-A L8
Description 1	Insul. interception rod+outlet
Description 2	for isCon conductor, internal
Dimension	8000mm
Material	Fibreglass reinforced plastic
Material symbol	GFK
Smallest sales unit (VG)	1,00 Piece
Weight	1.385,74 kg/100 pc.

Technical data sheet

Insulated air-termination rod for inner-routed isCon®
conductor with side exit
Item no. 5408878



Technical data

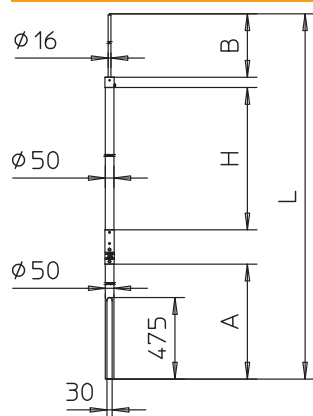

Length	8.000,00 mm
Dimension A	5.335,00 mm
Dimension B	1.000,00 mm
Dimension D	50,00 Ø mm
Dimension H	1.500,00 mm
Dimension L	8.000,00 mm
Connection	Round conductor
Version	Air-termination rod
High voltage-resistant, insulated version	☒