

Technical data sheet

Insulated air-termination rod

Item no. 5408942



- For isolated creation of air-termination systems
- Suitable for isFang air-termination rod stands, type isFang 3B-100/150
- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- For installation on the building structure with isFang support
- Fastening of the OBO isCon® conductor possible using accessories
- Suitable for externally routed isCon® conductors



GFK Fibre-glass-reinforced plastic

Master data

Item no.	5408942
Type	isFang 4000
Description 1	Insulated interception rod
Dimension	4000mm
Colour	Light grey
Material	Fibreglass reinforced plastic
Material symbol	GFK
Smallest sales unit (VG)	1,00 Piece
Weight	680,00 kg/100 pc.


Technical data sheet

Insulated air-termination rod

Item no. 5408942



Technical data

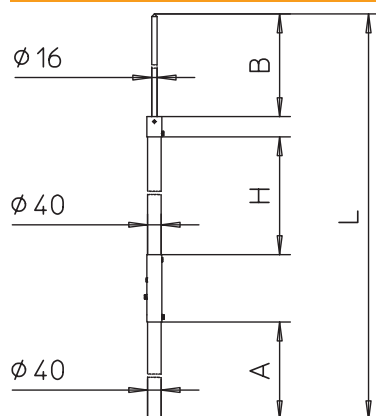

Length	4.000,00 mm
--------	-------------

Dimension A	1.240,00 mm
-------------	-------------

Dimension B	1.000,00 mm
-------------	-------------

Dimension D	40,00 Ø mm
-------------	------------

Dimension H	1.500,00 mm
-------------	-------------

Connection	Round conductor
------------	-----------------

Version	Air-termination rod
---------	---------------------

High voltage-resistant, insulated version	☒
---	-------------------------------------