


Technical data sheet

isFang, insulated air-termination rod for inner-routed
isCon® conductor Professional Plus
Item no. 5408934



- For installation of the OBO isCon® Pro+ conductor in the pipe
- For mounting on the building structure with isFang support
- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- Inclusive connection element (type isCon IN connect)
- Inclusive potential connection (type IsCon In PAE)

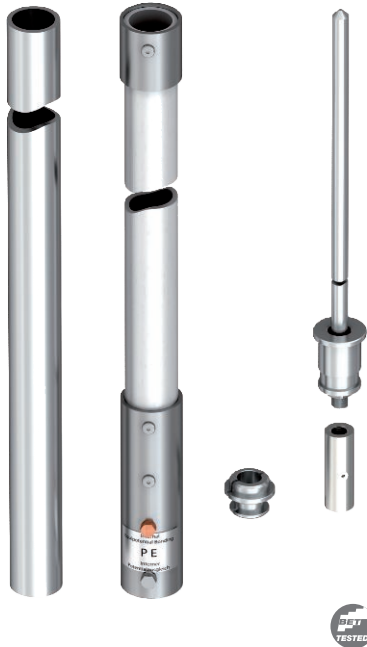

GFK Fibre-glass-reinforced plastic

Master data


Item no.	5408934
Type	isFang IN 4000
Description 1	Insulated interception rod
Description 2	for isCon conductor, internal
Dimension	4000mm
Material	Fibreglass reinforced plastic
Material symbol	GFK
Smallest sales unit (VG)	1,00 Piece
Weight	535,00 kg/100 pc.

Technical data sheet

isFang, insulated air-termination rod for inner-routed
isCon® conductor Professional Plus
Item no. 5408934



Technical data

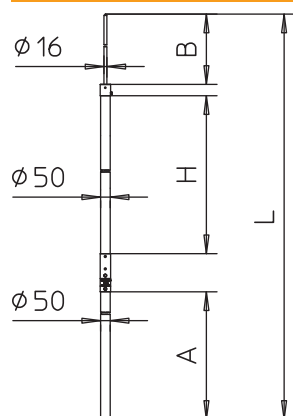

Length	4.000,00 mm
Dimension A	1.325,00 mm
Dimension B	1.000,00 mm
Dimension D	50,00 Ø mm
Dimension H	1.500,00 mm
Dimension L	4.000,00 mm
Connection	Round conductor
Version	Air-termination rod
High voltage-resistant, insulated version	☒