Technical data sheet

Aluminium pipe, with thread

Item no. 2046034



Electrical installation pipe to EN 61386-1 with threaded ends to DIN EN 60423 for mechanical protection of cables.
With burr-free inner wall. One connection sleeve is already screwed onto each pipe.


CE M

Alu Aluminium

Master data

Item no.	2046034
Type	SM25W ALU
Description 1	Aluminium conduit
Description 2	with thread
Dimension	M25x1,5,3000
Material	Aluminium
Material symbol	Alu
Smallest sales unit (VG)	30,00 m
Weight	37,23 kg/100 m

Technical data

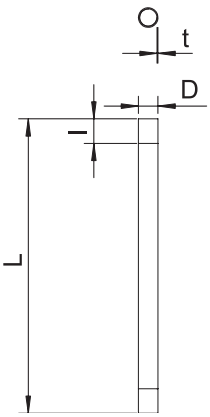

Length	3.000,00 mm
Dimension D	25,00 mm
Dimension L	3.000,00 mm
Dimension M	M25
Dimension t	1,90 mm
Dimension l	20,00 mm
Surface-mounted	☑
Pipe version	Rigid with thread
Concrete installation	☑
Pressure resistance class	Very heavy (Class 5)
Thread	M25x1,5
Cavity wall installation	☑
Installation on wood	☑
Installation under the ground	☑
Installation outdoors	☑
Machines and system installation	☑
Polished surface	☐

Technical data sheet

Aluminium pipe, with thread

Item no. 2046034

Technical data

Brushed surface	☐
max. permitted ambient temperature	-45,00 - 250,00 °C
Underfloor installation (bitumen, hot asphalt)	☑
Underfloor installation (screed)	☑
Concealed	☑

Classification for electrical pipe standards

Classification code	55561

Classification for electrical pipe standards