


Technical data sheet

Quick clip, for push-fit anchors, light grey

Item no. 2149701

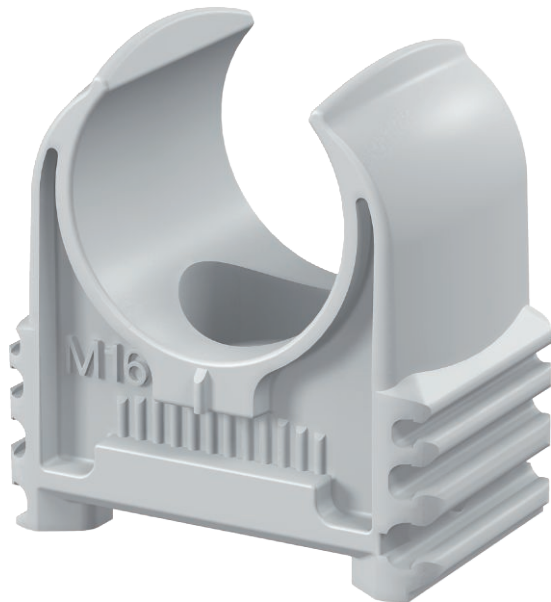

ABS/ASA Acrylonitrile butadiene styrene

OBO Quick clip, type 2957/...: for metric steel armoured pipes, M16 and M19-20 as well as light-duty and heavy-duty metric insulation pipes. Suitable for mounting the OBO Quick pipe. Pipe centring aids allow optimal attachment of the pipe in the clip. Universal fastening option; can be arranged with the OBO Multi-quick and starQuick clip. Slot for side alignment during mounting with wood screw or knock-in anchor. Size M16-M19-20 can be screwed onto an M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.

Master data

Item no.	2149701
Type	2957 M16
Description 1	Quick clip
Dimension	M16
Colour	Light grey
RAL number	7035
Material	Acrylnitrile-butadiene-styrene
Material symbol	ABS/ASA
Smallest sales unit (VG)	100,00 Piece
Weight	0,32 kg/100 pc.


Technical data sheet

Quick clip, for push-fit anchors, light grey

Item no. 2149701



Technical data

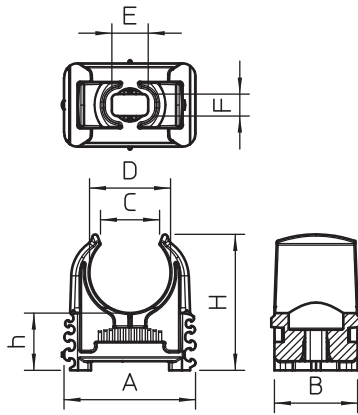

Dimension A	25,30 mm
Dimension B	16,00 mm
Dimension C	11,4 mm
Dimension D	15,60 mm
Dimension E	7,00 mm
Dimension F	4,20 mm
Dimension H	26,00 mm
Dimension h	7,00 mm
Expandable	☒
Number of cables/pipes	1,00
Fastening type	Screw hole
Closed	☐
Nominal size	M16
Halogen-free	☒
With inlay	☐
Clamping range D	16,00 mm
UV-resistant	☐