


Technical data sheet

G mesh cable tray Magic® 125

Item no. 6005556

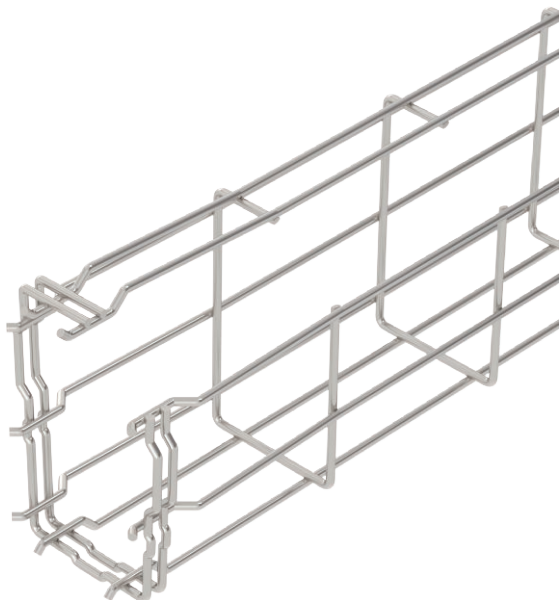

G-shaped mesh cable tray made of spot-welded steel wire with different side heights and widths. Direct wall or ceiling mounting possible. Load capacity details regarding the different mounting methods are available upon request.

CE

A2	Stainless steel, rustproof 1.4301
2B	Bright, reworked

Additional product text 1 | Magnetic shield insulation 15 dB.

Master data

Item no.	6005556
Type	G-GRM 125 75 A2
Description 1	G mesh cable tray Magic
Dimension	125x75x3000
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	3,00 m
Weight	108,00 kg/100 m


Technical data sheet

G mesh cable tray Magic® 125

Item no. 6005556



Technical data

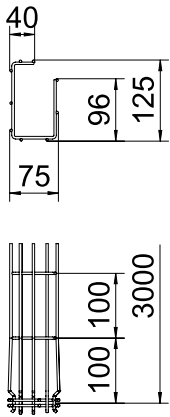

Length	3.000,00 mm
Width	75,00 mm
Height	125,00 mm
Side height	125,00 mm
Dimension A	96,00 mm
Dimension B	75,00 mm
Dimension C	38,00 mm
Dimension H	125,00 mm
Connector version	Integrated connector
Wire diameter	3,90 mm
Suitable for maintaining electrical function	<input type="checkbox"/>
Integrated partition	Without
Usable cross-section	61,00 cm ²
Usable cross-section	6.100,00 mm ²
Profile shape	G-shaped
Rustproof steel, pickled	<input checked="" type="checkbox"/>
Wide-span version	<input type="checkbox"/>

Appr. load:

Support spacing 1.0 m	0,60 kN/m
Support spacing 1.5 m	0,35 kN/m
Support spacing 2.0 m	0,30 kN/m
Support spacing 2.5 m	0,25 kN/m

Appr. load: