

Technical data sheet

Cable tray SKS 60

Item no. 6056742



SKS 60 = Heavy-duty cable tray system with 60 mm side height.



A2 Stainless steel, rustproof 1.4301
2B Bright, reworked

Additional product text, instruction | Connecting parts should be ordered in the appropriate quantity.

Additional product text 1 | Magnetic shield insulation without cover 20 dB, with cover 50 dB.

Master data

Item no.	6056742
Type	SKS 640 A2
Description 1	Cable tray SKS
Description 2	perforated
Manufacturer	OBO
Dimension	60x400x3000
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	3,00 m
Weight	553,67 kg/100 m

Technical data

Usable cross-section	23.800,00 mm ²
Usable cross-section	238,00 cm ²
Suitable for maintaining electrical function	<input type="checkbox"/>
Connector version	Without connectors
With cover	<input type="checkbox"/>
Mounting perforation in base	<input checked="" type="checkbox"/>

Technical data sheet

Cable tray SKS 60


Item no. 6056742



Technical data

NATO hole pattern	<input type="checkbox"/>
Rustproof steel, pickled	<input type="checkbox"/>
Side perforation	<input checked="" type="checkbox"/>
Wide-span version	<input type="checkbox"/>

Dimensions

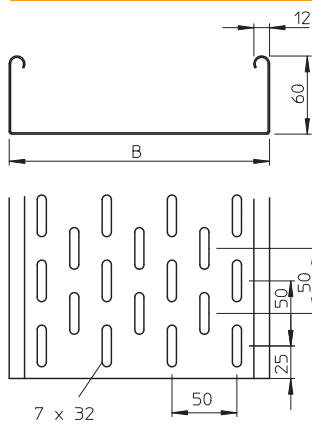


Length	3.000,00 mm
Width	400,00 mm
Height	60,00 mm
Side height	60,00 mm
Dimension B	400,00 mm
Plate thickness	1,50 mm

Appr. load:

Support spacing 1.5 m	2,65 kN/m
Support spacing 2.0 m	1,80 kN/m
Support spacing 2.5 m	1,15 kN/m
Support spacing 3.0 m	0,50 kN/m

Appr. load:

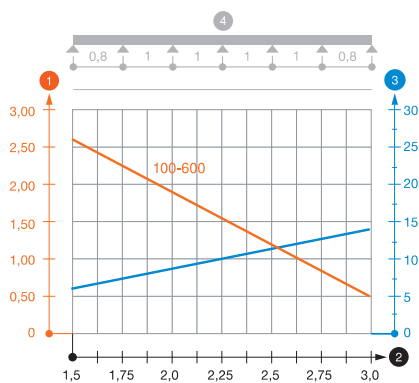

Load diagram, cable tray, type SKS 60

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width