

Technical data sheet

PV combination arrester V25, 900 V DC with remote signalling

Item no. 5097448




V25 combination arrester, type 1+2, for PV systems with FS contact as potential-free changeover

- Complete unit, consisting of plug-in varistor arrester with cut-off unit
- Error-resistant Y circuit for use according to VDE 0100-712 (EN 50539-12)
- Surge protection equipotential bonding to VDE 0100-443 (IEC 60364-4-44)
- Arresting capacity to 7 kA (10/350) and 50 kA (8/20) per pole
- Low DC protection level: < 3.0 kV and Voc max. = 900 V DC
- With visual display for use in distributor housings

Application: PV systems with lightning protection system



Dimensions

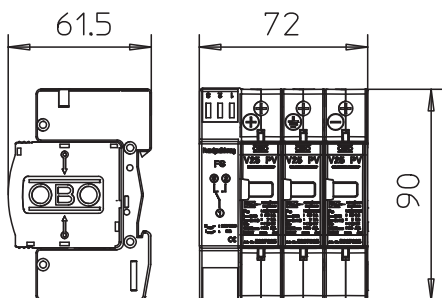

Master data

Item no.	5097448
Type	V25-B+C 3PHFS900
Description 1	CombiController V25
Description 2	three-pole for PV systems + RS
Dimension	900V DC
Smallest sales unit (VG)	1,00 Piece
Weight	53,50 kg/100 pc.


Technical data sheet

PV combination arrester V25, 900 V DC with remote signalling

Item no. 5097448



Technical data

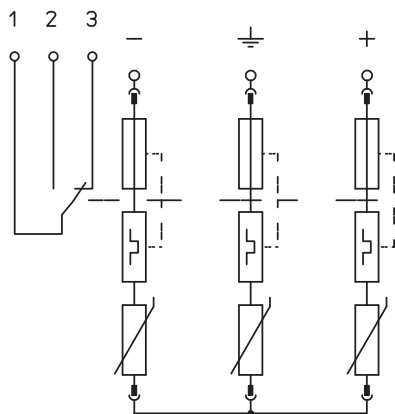

SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-11	Class I+II
Maximum continuous voltage DC	900,00 V
U max DC	900,00 V
Nominal discharge current (8/20)	30 kA
Nominal discharge current (8/20 µs) [L-N]	30,00 kA
Maximum discharge current (8/20 µs)	50,00 kA
Impulse discharge current (10/350)	7,00 kA
Protection level	< 3,0 kV
Response time	< 25 ns
Maximum back-up fuse	160,00 A
Temperature range	-40-+80 °C
Pole version	3
Version	3 pole for PV systems with RS
Version	3-pole
Protection rating	IP20
Protection rating	IP 20
Blow-out	<input type="checkbox"/>
Division unit TE (17.5 mm)	4
Telecommunications contact	<input checked="" type="checkbox"/>
Connection cross-section, flexible	2,50 - 25,00 mm ²
Connection cross-section, rigid	2,50 - 35,00 mm ²
Connection cross-section, multi-wire	2,50 - 35,00 mm ²
Signalling on device	Visual