

# Technical data sheet

## Device installation trunking, type GA-S90130

Item no. 6276900



Device installation trunking Without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.



**Alu** Aluminium

|                                      |   |
|--------------------------------------|---|
| Additional product text, instruction | The cover must be ordered separately. We recommend the use of the trunking clamp.   |
| Additional product text 1            | Note:<br>For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium). |

### Master data

|                          |                              |
|--------------------------|------------------------------|
| Item no.                 | 6276900                      |
| Type                     | GA-S90130RW                  |
| Description 1            | Device installation trunking |
| Description 2            | symmetrical                  |
| Dimension                | 90x130x2000                  |
| Colour                   | Pure white                   |
| RAL number               | 9010                         |
| Material                 | Aluminium                    |
| Material symbol          | Alu                          |
| Smallest sales unit (VG) | 2,00 m                       |
| Weight                   | 241,30 kg/100 m              |


# Technical data sheet

## Device installation trunking, type GA-S90130

Item no. 6276900



### Technical data

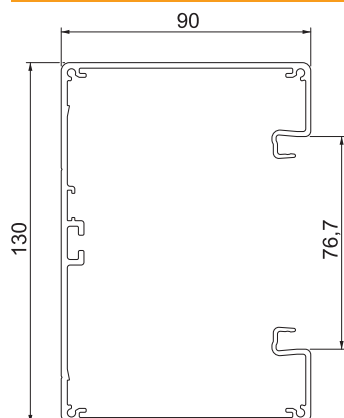

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Length                          | 2.000,00 mm                         |
| Width                           | 130,00 mm                           |
| Height                          | 90,00 mm                            |
| Number of covers                | 1,00                                |
| Number of insertable partitions | 1,00                                |
| Rear panel version (inner side) | Continuous C profile                |
| Rectangular shape               | <input checked="" type="checkbox"/> |
| Base perforation                | Without base perforation            |
| Halogen-free                    | <input checked="" type="checkbox"/> |
| Cable retaining clip            | <input type="checkbox"/>            |
| Duct depth                      | 90,00 mm                            |
| Trunking height                 | 130,00 mm                           |
| Duct connector                  | <input type="checkbox"/>            |
| Cover mounting type             | Internal                            |
| Mounting perforation in base    | <input type="checkbox"/>            |
| Usable cross-section            | 6.480,00 mm <sup>2</sup>            |
| Cover width                     | 76,5 mm                             |
| Cover width 2                   | 0,00 mm                             |
| Cover width 3                   | 0,00 mm                             |
| Cover supplied                  | <input type="checkbox"/>            |
| Protective film                 | <input checked="" type="checkbox"/> |
| Symmetrical                     | <input checked="" type="checkbox"/> |