

Technical data sheet

Device installation trunking, type GA-D90210

Item no. 6279603



Device installation trunking Without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.



Alu	Aluminium
EL	Anodised

Additional product text, instruction	The cover must be ordered separately. We recommend the use of the trunking clamp.
Additional product text 1	Note: For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).

Master data

Item no.	6279603
Type	GA-D90210EL
Description 1	Device installation trunking
Description 2	2 compartments
Dimension	90x210x2000
Material	Aluminium
Material symbol	Alu
Surface	Anodised
Surface symbol	EL
Smallest sales unit (VG)	2,00 m
Weight	378,60 kg/100 m


Technical data sheet

Device installation trunking, type GA-D90210

Item no. 6279603



Technical data

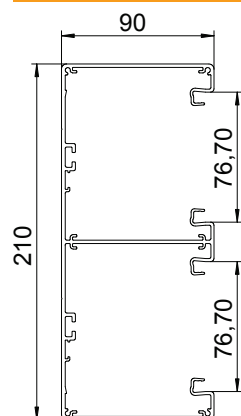

Length	2.000,00 mm
Width	210,00 mm
Height	90,00 mm
Number of covers	2,00
Number of insertable partitions	2,00
Rear panel version (inner side)	Continuous C profile
Rectangular shape	<input checked="" type="checkbox"/>
Base perforation	Without base perforation
Halogen-free	<input checked="" type="checkbox"/>
Cable retaining clip	<input type="checkbox"/>
Duct depth	90,00 mm
Trunking height	210,00 mm
Duct connector	<input type="checkbox"/>
Cover mounting type	Internal
Mounting perforation in base	<input type="checkbox"/>
Usable cross-section	14.688,00 mm ²
Cover width	76,5 mm
Cover width 2	76,50 mm
Cover width 3	0,00 mm
Cover supplied	<input type="checkbox"/>
Protective film	<input checked="" type="checkbox"/>
Symmetrical	<input type="checkbox"/>