


# Technical data sheet

## Wall and support bracket AW 30

Item no. 6442838

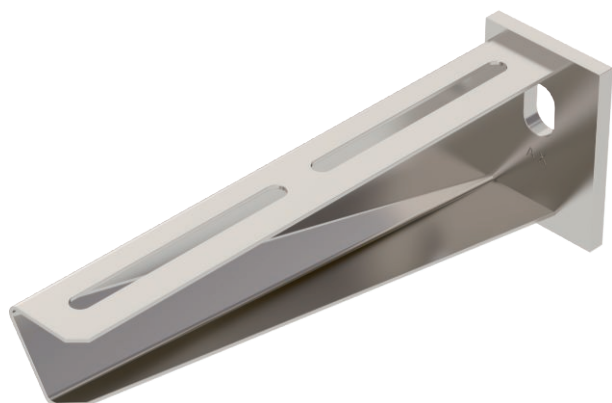

Medium-duty wall and support bracket with welded head plate.




A2	Stainless steel, rustproof 1.4301
2B	Bright, reworked

Additional product text, instruction	Fastening of the bracket to the U support of width 400 mm or greater using a hexagonal bolt through both sides of the support. Please insert suitable spacers.
--------------------------------------	--

### Master data

Item no.	6442838
Type	AW 30 21 A2
Description 1	Wall and support bracket
Description 2	with welded head plate
Dimension	B210mm
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	1,00 Piece
Weight	37,50 kg/100 pc.

### Technical data

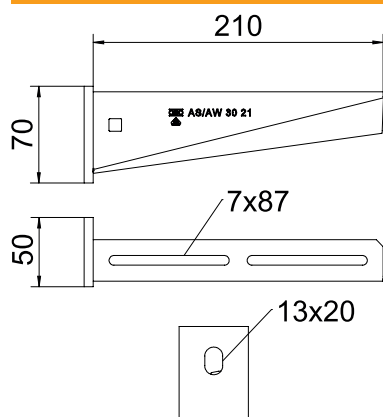

Length	210,00 mm
Width	210,00 mm
Side height	70,00 mm
Dimension A	50,00 mm
Dimension B	210,00 mm
Dimension H	70,00 mm
Dimension L	210,00 mm
Hole diameter	13,00 mm
Dimension value	210 x 70
Version	Wall and support brackets
Version	Wall and support bracket
F in kN	3,00 kN
Suitable for maintaining electrical function	<input type="checkbox"/>
Rustproof steel, pickled	<input checked="" type="checkbox"/>

# Technical data sheet

## Wall and support bracket AW 30




Item no. 6442838

### Technical data

Angle range | 90,00 - 90,00 °

### Load charts

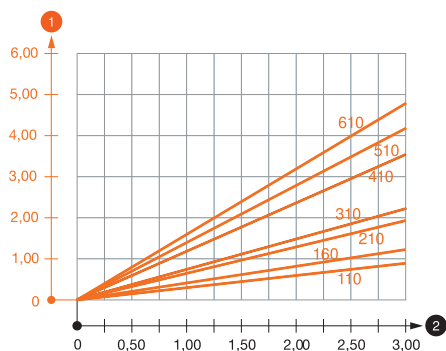

Load values heading\_Characteristic anchor values  
Heading, load table  
Footnote, load table

Characteristic anchor load values for wall and support bracket AW 30

Wall bracket load

Max. total load  $F = \text{cable weight} + \text{cable tray} + \text{bracket}$ . The load capacity values increase considerably when used in uncracked concrete. The values given are based on concrete of strength class C20/25. Observe the installation conditions of the DIBt approval (anchors).

Load diagram, bracket AW 30 VA

- ① Bending of the bracket tip at permitted bracket load
- ② Permitted bracket load in kN without man load
- Load curve with bracket lengths in mm

### Characteristic anchor load values for wall and support bracket AW 30

Bracket load		Max. total load F in kN						
	Anchor	Bracket length in mm						
	Permitted							
	F kN	100	200	300	400	500	600	
	3,57	1,66	1,12	0,99	0,76	0,74	0,74	
	4,76	2,21	1,50	1,32	1,01	0,99	0,99	

Max. total load  $F = \text{cable weight} + \text{cable tray} + \text{bracket}$ . The load capacity values increase considerably when used in uncracked concrete. The values given are based on concrete of strength class C20/25. Observe the installation conditions of the DIBt approval (anchors).

### Characteristic anchor load values for wall and support bracket AW 30

T1	Bracket load						
T2	Anchor	Max. total load F in kN					
T3	Permitted	Bracket length in mm					
T4	F kN	100	200	300	400	500	600
	3,57	1,66	1,12	0,99	0,76	0,74	0,74
	4,76	2,21	1,50	1,32	1,01	0,99	0,99