Technical data sheet

Quick pipe, pure white

Item no. 2153966

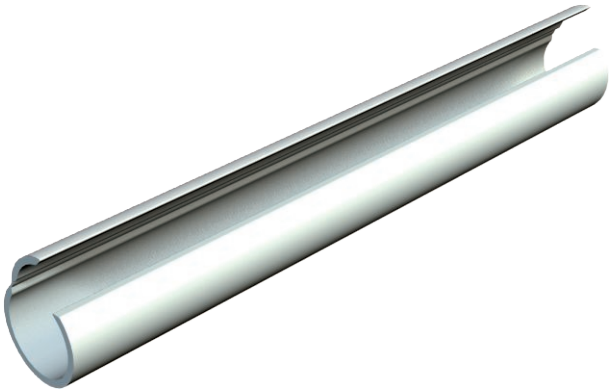

Quick Pipe combines the advantages of cable ducting and installation pipe into an intelligent system. This system allows tidy and safe surface-mounted installation of all kinds of cables on walls and ceilings. Quick pipe is available in four metric sizes: M16, M20, M25 and M32 and the stock length is 2 m.
The system is VDE-tested and achieves a protection rating of IP44. The Quick pipe can be used in the temperature range from –25 to +60 °C and can withstand an impact energy of 5 J.
The fittings are a component part of the system. The smallest shipped quantity is one shipping box.

CE IP 44 M

PVC Polyvinylchloride

Master data

Item no.	2153966
Type	2953 M25 RW
Description 1	Quick pipe
Dimension	M25
Colour	Pure white
RAL number	9010
Material	Polyvinylchloride
Material symbol	PVC
Smallest sales unit (VG)	30,00 m
Weight	16,00 kg/100 m

Technical data

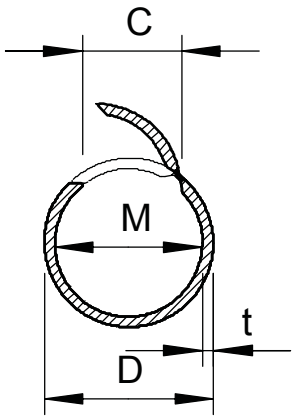

Length	2.000,00 mm
Dimension C	13.6 mm
Dimension D	25,00 mm
Dimension M	21,8
Dimension t	1,60 mm
Surface-mounted	☑
Flame-resistant version	☐
type	Moulded, self-closing cover
Concrete installation	☑
Size	M25
Halogen-free	☐
Installation on wood	☑
Installation under the ground	☐
Installation outdoors	☐
Machines and system installation	☑
With sleeve	☐
Temperature range	-25-+60 °C
Underfloor installation (screed)	☐

Technical data sheet

Quick pipe, pure white

Item no. 2153966

Technical data

Concealed	□

Classification for electrical pipe standards

Classification for electrical pipe standards