


Technical data sheet

33° socket, with earthing pin, double

Item no. 6120246

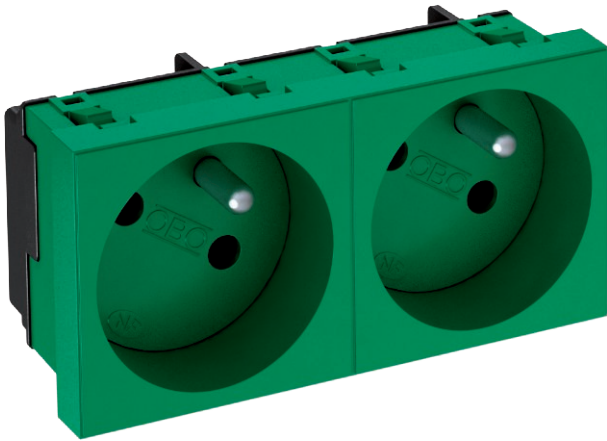

Socket with earthing pin Double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250V ~, with connection terminals to IEC 60884-1.



PC

Polycarbonate



Additional product text 2

For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.

Master data

Item no.	6120246
Type	STD-F3 MZGN2
Description 1	Socket 33°, double
Description 2	with earth pin
Dimension	250V, 10/16A
Colour	Mint green
RAL number	6029
Material	Polycarbonate
Material symbol	PC
Smallest sales unit (VG)	1,00 Piece
Weight	7,50 kg/100 pc.

Technical data



Width	90,00 mm
Height	45,00 mm
Depth	39,00 mm
Cover	Central plate
Closable	☐
Connection type	Screwless terminal
Printed label/coding	Without printing
Version	Double 33°
Version	Socket 33°, double, with earth pin
Surface version	Matt
Sockets/switch version	Protective contact pin
Version for	Protective contact pin
Number of poles	2,00
Number of units	2,00

Technical data sheet

33° socket, with earthing pin, double

Item no. 6120246



Technical data

Number of modules (for modular construction)	2,00
Number of switchable sockets	0,00
Ejection mechanism	☐
Fastening type	Lock
Labelling panel	☐
Operating temperature	-5,00 - 40,00 °C
Error current protection	☐
For more difficult conditions (according to VDE)	☐
Halogen-free	☒
Insulated installation	☐
Increased touch protection	☒
Hinged cover	☐
Coding	No
Warning light	☐
With on/off switch	☐
With fine-wire fuse	☐
With functional lighting	☐
With orientation lighting	☐
Mounting type	Device installation duct
Nominal voltage	250,00 V
Nominal current	16,00 A
Protection rating	Other
Special power supply	Without special power supply
Socket version	NF
Socket angle	33°
Transparent	☐
Surge protection	☐
Rotated central insert	☒