


Technical data sheet

33° socket, with earthing pin, triple

Item no. 6120266

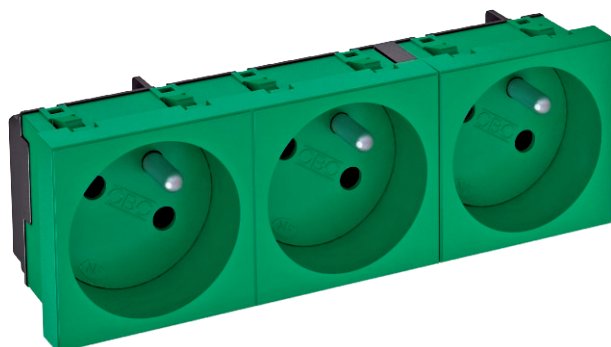

Socket with earthing pin Triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250V ~, with connection terminals to IEC 60884-1.



PC Polycarbonate


Additional product text 2

For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.

Master data

Item no.	6120266
Type	STD-F3 MZGN3
Description 1	Socket 33°, triple
Description 2	with earth pin
Dimension	250V, 10/16A
Colour	Mint green
RAL number	6029
Material	Polycarbonate
Material symbol	PC
Smallest sales unit (VG)	1,00 Piece
Weight	10,50 kg/100 pc.

Technical data

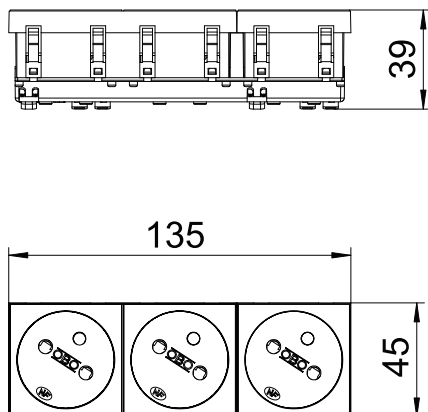

Width	135,00 mm
Height	45,00 mm
Depth	39,00 mm
Cover	Central plate
Closable	☐
Connection type	Screwless terminal
Printed label/coding	Without printing
Version	Triple 33°
Version	Socket 33°, triple, with earth pin
Surface version	Matt
Sockets/switch version	Protective contact pin
Version for	Protective contact pin
Number of poles	2,00
Number of units	3,00
Number of modules (for modular construction)	3,00
Number of switchable sockets	0,00

Technical data sheet

33° socket, with earthing pin, triple

Item no. 6120266



Technical data

Ejection mechanism	☐
Fastening type	Lock
Labelling panel	☐
Operating temperature	-5,00 - 40,00 °C
Error current protection	☐
For more difficult conditions (according to VDE)	☐
Halogen-free	☒
Insulated installation	☐
Increased touch protection	☒
Hinged cover	☐
Coding	No
Warning light	☐
With on/off switch	☐
With fine-wire fuse	☐
With functional lighting	☐
With orientation lighting	☐
Mounting type	Device installation duct
Nominal voltage	250,00 V
Nominal current	16,00 A
Protection rating	Other
Special power supply	Without special power supply
Socket version	NF
Socket angle	33°
Transparent	☐
Surge protection	☐
Rotated central insert	☒