

SYSTEM 2000

kształtki do rur PE i PVC




Łuki

Nr kat. 8535 90°

Nr kat. 8545 45°

Nr kat. 8555 30°

Nr kat. 8557 11°

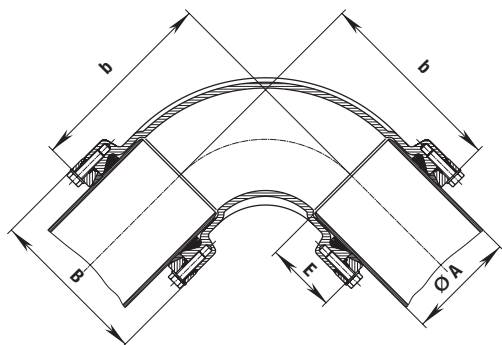

UWAGA! Do cienkościennych rur (o grubości ścianki poniżej 3 mm) oraz do przewodów podciśnieniowych należy stosować tuleje wzmacniające



Rura Ø mm	b				E	B	Masa kg			
	90°	45°	30°	11°			90°	45°	30°	11°
63	153	112			80	124	4,2	4,7		
75	170	120			82	138	5,5	5,0		
90	188	129	115	98	85	152	7,6	6,4	5,8	5,7
110	213	140	122	100	85	172	10,0	7,9	7,2	6,6
125	240	153			87	193	9,8	9,9		
140	246	159			93	210	15,0	13,1		
160	283	181	120	115	105	236	19,5	16,0	15,0	14,5
180	293	191			113	258	26,0	21,0		
200	353	221			125	284	37,5	30,0		
225	355	224	136		128	314	43,0	32,0	16,5	
250	427	263			145	347	57,0	47,0		
280	430	266			148	376	69,0	55,0		
315	506	313			174	422	100,0	80,0		

Nr kat.	PN	Średnica nominalna DN/ Ø rury												
		63	75	90	110	125	140	160	180	200	225	250	280	315
8535 90°	16													
8545 45°														
8555 30°														
8557 11°														