


Króciec Geberit Mapress C-Stahl, ocynkowany zewnętrznie

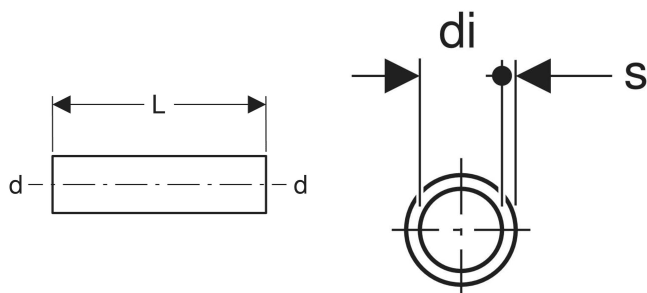

Ilustracja przykładowa

CHARAKTERYSTYKA

- Ocynkowany zewnętrznie

DANE TECHNICZNE

Materiał

Stal niestopowa 1.0034 E195
(EN 10305)

Nr art.	DN	d _o mm	d _i mm	s mm	L cm	PLN netto	PLN brutto
22050	12	15	12.6	1.2	5	5,25	6,46
22051	15	18	15.6	1.2	5	6,20	7,63
22052	20	22	19	1.5	5.2	8,70	10,70
22053	25	28	25	1.5	5.6	8,85	10,89
22054	32	35	32	1.5	6.2	13,95	17,16
22055	40	42	39	1.5	8	22,75	27,98

<i>Nr art.</i>	<i>DN</i>	<i>d_g</i> <i>mm</i>	<i>d_i</i> <i>mm</i>	<i>s</i> <i>mm</i>	<i>L</i> <i>cm</i>	<i>PLN netto</i>	<i>PLN brutto</i>
22056	50	54	51	1.5	9	28,15	34,62
22057	65	76.1	72.1	2	13.6	133,30	163,96
22058	80	88.9	84.9	2	15	155,85	191,70
22059	100	108	104	2	18	219,00	269,37