




Features

- Multidiameter pipe design covering the main pipe sizes in just 3 references.
- Fast installation. This clamp can be tightly closed by pressing the pipe without tools.
- Designed for all types of pipes (multilayer, polypropylene, polybutilene, copper, steel, etc.).
- Developed for direct impact fixing with a nailer. Compatible with FORCE ONE+, FOX and other nailers.
- It can also be fixed with up to Ø 4.5 mm screw, BTS-4 or 20x10 mm rails.
- Smart design with side tabs to join multiple clamps that saves fixing points.

Certificates and approvals



Main dimensions

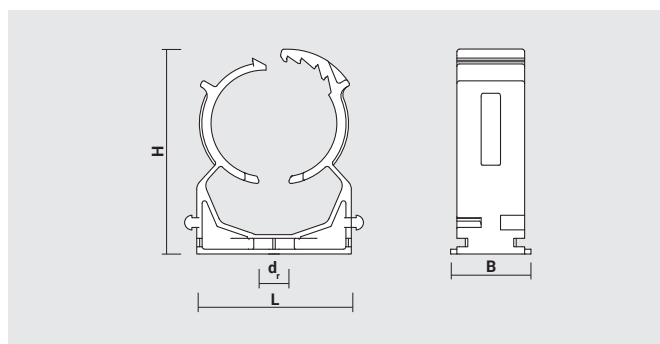

Base materials

- Steel
- Concrete
- Solid brick
- Hollow slab
- Wood

Reference	d _i [mm]	L [mm]	B [mm]	H [mm]
20ANE	4.5	28	14	36
120ANE	4.5	28	14	36
420ANE	4.5	28	14	36
25ANE	4.5	32	14	42
125ANE	4.5	32	14	42
425ANE	4.5	32	14	42
32ANE	4.5	36	14	48
132ANE	4.5	36	14	48
432ANE	4.5	36	14	48

Available colors

Manufactured with HDPE in 3 colours:

- White RAL 9003
- Grey RAL 7035
- Black RAL 9011 (UV-resistant)

Installation procedure



Technical specifications

Reference	Pipe diameter clamping range		Resistance test		
			Insertion test [kg]		Pull out test [kg]
	Ø Min. [mm]	Ø Max. [mm]	Ø Min.	Ø Max.	
20ANE	16	20	3	4.5	47
120ANE	16	20	3	4.5	47
420ANE	16	20	3	4.5	47
25ANE	22	26	4.9	6	40
125ANE	22	26	4.9	6	40
425ANE	22	26	4.9	6	40
32ANE	28	32	3	4	40
132ANE	28	32	3	4	40
432ANE	28	32	3	4	40